

موتور ویبره KEM_P 1500 rpm



kalasanati.com




[@kalasanati.ir](https://www.instagram.com/kalasanati.ir)



[+982188544230](tel:+982188544230)

Catalog 2021

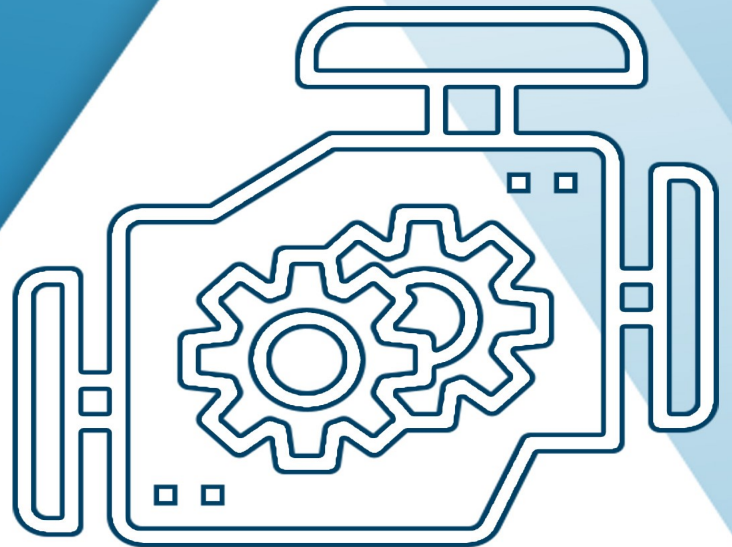

Vibration motor



Kalasanati.com

Training, Selecting, Purchasing

Kem-P[®] Vibration Motors



Vibration motor

Kalasanati.com

II 2D Ex tb IIIB T 120° C Db - IP 66

Model Type	Gövde Size	II 2D Sınıfı Class	Santrüfuj Kuvveti Centrifugal Force				(*)Statik Moment Statical Moment		Ağırlık Weight		Giriş Gücü Input Power		Nominal Akım Nom. Current		I _A / I _N	
			(Kg/F)		(KN)		(Kgmm)		(Kg)		(W)		(A)			
			50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	400V 50Hz	460V 60Hz	50Hz	60Hz
EVM 20/15	01	120°	23	22	0,226	0,216	9,1	6,1	4,5	4,3	80	85	0,20	0,20	2,00	2,00
EVM 30/15	01	120°	31	33	0,304	0,324	12,3	9,1	4,7	4,5	80	85	0,20	0,20	2,00	2,00
EVM 60/15	01	120°	53	55	0,520	0,540	21,1	15,2	5,2	4,9	95	105	0,21	0,21	2,10	2,50
EVM 90/15	01	120°	84	88	0,824	0,863	33,4	24,3	6	5,6	95	105	0,21	0,21	3,30	3,70
EVM 200/15	02	120°	214	199	2,099	1,952	85,1	54,9	11	10	180	190	0,45	0,37	2,20	2,50
EVM 250/15	02	120°	242	239	2,374	2,345	96,2	66,0	11,5	10,7	240	270	0,52	0,45	2,40	2,50
EVM 300/15	03-b	120°	319	319	3,129	3,129	126,8	88,1	17,2	16	270	285	0,60	0,55	2,50	2,50
EVM 400/15	03-b	120°	415	418	4,071	4,101	165,0	115,4	18,6	17	310	370	0,66	0,66	2,60	3,00
EVM 520/15	03-b	120°	512	597	5,023	5,857	203,6	164,8	20,6	19,2	340	400	0,71	0,71	3,20	3,90
EVM 750/15	04-a	120°	735	704	7,210	6,906	292,2	194,4	28	25,6	475	525	0,92	0,90	3,00	3,20
EVM 900/15	04-b	120°	865	823	8,486	8,074	343,9	227,2	30,3	27	570	630	1,10	1,08	3,00	3,30
EVM 1100/15	04-b	120°	1110	1010	10,889	9,908	441,3	278,9	34,2	28,5	600	680	1,16	1,14	3,60	3,90
EVM 1300/15	04-c	120°	1306	1246	12,812	12,223	519,3	344,0	36,3	31,3	720	816	1,36	1,30	4,00	4,00
EVM 1500/15	05-b	120°	1477	1604	14,489	15,735	587,2	442,9	45	42,8	950	1100	1,50	1,50	4,10	4,40
EVM 1800/15	05-b	120°	1765	1920	17,315	18,835	701,7	530,1	46,7	44,2	1140	1185	1,80	1,80	4,40	4,70
EVM 2000/15	05-b	120°	2089	2092	20,493	20,523	830,6	577,6	52,9	48,7	1200	1250	2,20	2,00	4,50	4,50
EVM 2300/15	05-b	120°	2379	2356	23,338	23,112	945,8	650,5	54,5	49,7	1300	1400	2,30	2,10	4,90	4,90
EVM 2450/15	06-a	--	2568	2520	25,192	24,721	1021,0	695,8	105	100	1450	1525	2,56	2,40	5,80	5,80
EVM 2700/15	06-a	--	2758	2519	27,056	24,711	1096,5	695,5	107	102	1700	1800	3,30	3,10	6,00	5,90
EVM 3100/15	06-a	--	3150	3142	30,902	30,823	1252,4	867,5	109	103	2000	2100	3,65	3,60	6,40	6,40
EVM 3800/15	07-b	--	3844	3780	37,710	37,082	1528,3	1043,7	146	139	2200	2450	4,60	4,70	6,70	6,70
EVM 4300/15	07-b	--	4403	4110	43,193	40,319	1750,6	1134,8	148	140	2900	3100	5,10	5,10	7,00	6,90
EVM 5000/15	08-a	--	5552	5189	54,465	50,904	2207,4	1432,7	182	173	3300	3300	5,40	4,90	7,00	6,90
EVM 6000/15	08-a	--	6224	6194	61,057	60,763	2474,6	1710,2	184	176	4350	4500	7,60	7,40	7,20	7,10
EVM 7000/15	09-a	--	6640	6607	65,138	64,815	2640,0	1824,2	293	284	6000	6000	10,50	9,50	6,70	6,70
EVM 7500/15	09-a	--	7408	7189	72,672	70,524	2845,3	1984,9	296	286	6500	6800	11,00	11,00	7,10	6,90
EVM 7900/15	09-a	--	8195	8021	80,393	78,686	3258,2	2214,6	299	288	7000	8000	11,50	11,50	7,00	7,00
EVM 9500/15	10-a	--	9611	9079	94,284	89,065	3821,2	2506,7	351	349	7500	8500	12,50	12,00	6,70	6,20
EVM 11500/15	10-a	--	11444	10878	112,266	106,713	4550,0	3003,4	361	348	11000	11000	19,00	16,00	7,00	6,80


(*) Working moment = 2x static moment



Kalasanati.com



Kalasanati.com

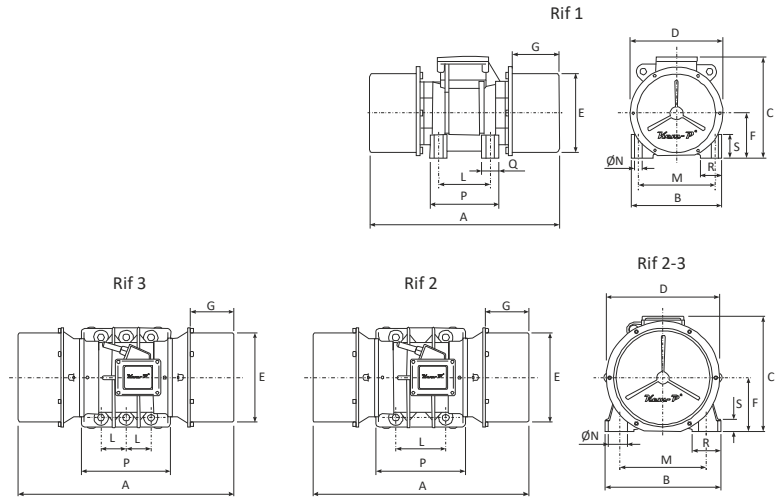

Model Type	Gövde Size	Gövde Ölçüleri - Overall Dimensions (mm)															
		Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S	
EVM 20/15	01	1	242,5	125	145	109	100	58	60,5	62÷74	106	8,75 4	90	23	23	23	
EVM 30/15	01	1	242,5	125	145	109	100	58	60,5	62÷74	106	8,75 4	90	23	23	23	
EVM 60/15	01	1	242,5	125	145	109	100	58	60,5	62÷74	106	8,75 4	90	23	23	23	
EVM 90/15	01	1	242,5	125	145	109	100	58	60,5	62÷74	106	8,75 4	90	23	23	23	
EVM 200/15	02	1	300	153	182	135	123	72	74,5	90	125	13,5 4	117	27	27	30	
EVM 250/15	02	1	300	153	182	135	123	72	74,5	90	125	13,5 4	117	27	27	30	
EVM 300/15	03-b	1	365	190	208	187	155	90,5	96,5	100÷105	140÷160	12 4	133	33	40	45	
EVM 400/15	03-b	1	365	190	208	187	155	90,5	96,5	100÷105	140÷160	12 4	133	33	40	45	
EVM 520/15	03-b	1	365	190	208	187	155	90,5	96,5	100÷105	140÷160	12 4	133	33	40	45	
EVM 750/15	04-a	1	400	210	237	215	182	104	92	120	170	17 4	160	40	50	53,5	
EVM 900/15	04-b	1	439	210	237	215	182	104	112,5	120	170	17 4	160	40	50	53,5	
EVM 1100/15	04-b	1	439	210	237	215	182	104	112,5	120	170	17 4	160	40	50	53,5	
EVM 1300/15	04-b	1	439	210	237	215	182	104	112,5	120	170	17 4	160	40	50	53,5	
EVM 1500/15	05-b	1	482	235,5	259	258	221	117	112	140÷150	190	18,5 4	194	50	51	56	
EVM 1800/15	05-b	1	482	235,5	259	258	221	117	112	140÷150	190	18,5 4	194	50	51	56	
EVM 2000/15	05-b	1	482	235,5	259	258	221	117	112	140÷150	190	18,5 4	194	50	51	56	
EVM 2300/15	05-b	1	482	235,5	259	258	221	117	112	140÷150	190	18,5 4	194	50	51	56	
EVM 2450/15	06-a	2	580	280	275	280	242	133	114	155	225	22 4	252,5	**	64	30	
EVM 2700/15	06-a	2	580	280	275	280	242	133	114	155	225	22 4	252,5	**	64	30	
EVM 3100/15	06-a	2	580	280	275	280	242	133	114	155	225	22 4	252,5	**	64	30	
EVM 3800/15	07-a	2	595	320	315	327	283	160	110	155	255	22 4	284	**	74	35	
EVM 4300/15	07-a	2	595	320	315	327	283	160	110	155	255	22 4	284	**	74	35	
EVM 5000/15	08-a	2	667	342	342	354	310	172	108	180	280	25 4	311	**	71	40	
EVM 6000/15	08-a	2	667	342	342	354	310	172	108	180	280	25 4	311	**	71	40	
EVM 7000/15	09-a	3	745	395	405	398	359,5	196	115	100x2	320	28 6	340	**	78	40	
EVM 7500/15	09-a	3	745	395	405	398	359,5	196	115	100x2	320	28 6	340	**	78	40	
EVM 7900/15	09-a	3	745	395	405	398	359,5	196	115	100x2	320	28 6	340	**	78	40	
EVM 9500/15	10-a	3	816	463	431,5	467	412	222	116	125x2	380	38 6	398	**	88	50	
EVM 11500/15	10-a	3	816	463	431,5	467	412	222	116	125x2	380	38 6	398	**	88	50	